

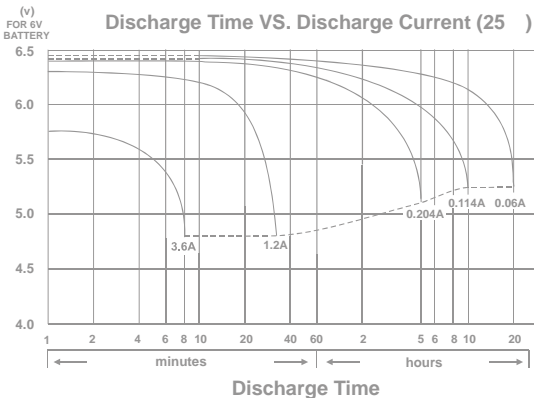


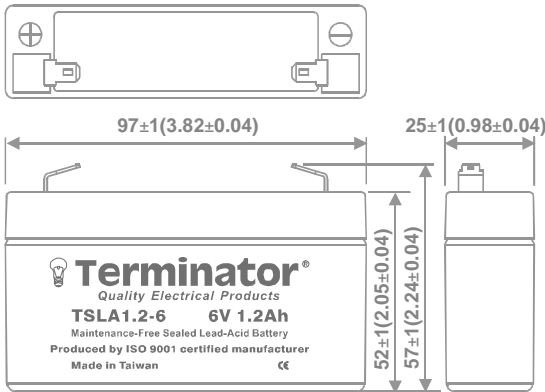

Dimensions mm(inch)



TSLA1.2-6

Specifications

Nominal Voltage(V) **6V**

Nominal Capacity

20 hour rate	(0.06A to 5.25V)	1.2Ah
10 hour rate	(0.114A to 5.25V)	1.14Ah
5 hour rate	(0.204A to 5.1V)	1.02Ah
1 C	(1.2A to 4.8V)	0.68Ah
3 C	(3.6A to 4.8V)	0.48Ah

Weight **Approx. 310g(0.68Lbs.)**

Internal Resistance (at 1KHz) **Approx. 41 mΩ**

Maximum Discharge Current for

5 seconds: **18A**

Charging Methods at 25 (77 °C)

Cycle use:

Charging Voltage **7.20 to 7.50V**

Coefficient **-5.0mv/°C/cell**

Maximum Charging Current : **0.36A**

Standby use:

Float Charging Voltage **6.75 to 6.90V**

Coefficient **-3.0mv/°C/cell**

Operating Temperature Range

Charge **-15 (5 °C) to 40 (104 °F)**

Discharge **-15 (5 °C) to 50 (122 °F)**

Storage **-15 (5 °C) to 40 (104 °F)**

Charge Retention (shelf life) at 20 (68 °C)

1 month **92%**

3 month **90%**

6 month **80%**

Case Material

**ABS
(UL94 HB)**

Terminal

F1 (Faston Tab 187)

TSLA1.2-6

- PERFORMANCE DATA

Discharge Rates in Amperes to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	3.49	4.11	4.57	4.94	5.09	5.26	5.51
10	min	2.12	2.43	2.63	2.81	2.88	2.96	3.11
15	min	1.71	1.95	2.09	2.20	2.24	2.29	2.35
30	min	0.931	1.06	1.17	1.24	1.26	1.29	1.32
60	min	0.680	0.716	0.735	0.759	0.765	0.772	0.779
120	min	0.392	0.415	0.429	0.440	0.444	0.449	0.456
180	min	0.272	0.291	0.302	0.311	0.314	0.318	0.324
240	min	0.223	0.238	0.247	0.254	0.257	0.260	0.264
300	min	0.207	0.219	0.226	0.231	0.233	0.236	0.238
600	min	0.112	0.117	0.121	0.124	0.125	0.126	0.127
1200	min	0.0615	0.0624	0.0631	0.0637	0.0639	0.0642	0.0646


Discharge Rates in Watts to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	21.6	23.5	24.8	26.0	26.4	27.0	27.9
10	min	13.9	15.0	15.9	16.6	16.8	17.0	17.3
15	min	11.0	11.6	12.2	12.6	12.8	13.0	13.2
30	min	6.45	6.75	6.95	7.10	7.15	7.25	7.35
60	min	3.96	4.18	4.30	4.40	4.44	4.49	4.55
120	min	2.24	2.43	2.54	2.63	2.66	2.70	2.75
180	min	1.60	1.72	1.81	1.87	1.90	1.94	1.97
240	min	1.31	1.41	1.49	1.54	1.56	1.59	1.61
300	min	1.26	1.33	1.37	1.41	1.42	1.43	1.45
600	min	0.660	0.700	0.730	0.750	0.755	0.765	0.775
1200	min	0.369	0.379	0.386	0.390	0.392	0.394	0.396


All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%),10min X < 60min(+8% ~-8%), X 60min(+5%~-5%)


Effect of Temperature on Capacity 25 (77)

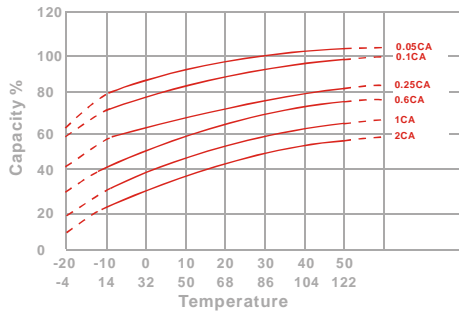

Capacity Retention Characteristic

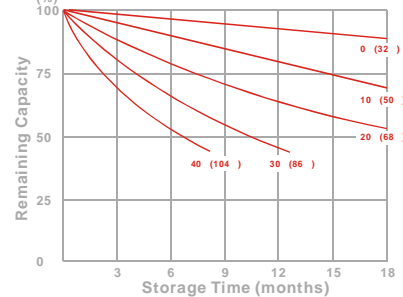

Trickle (or float) Service Life



Cycle Service Life

